



Morehouse
THE FORCE IN CALIBRATION SINCE 1925

PG-4101
Rev. 4/2022

ISO/IEC 17025 / ANSI/NCSLI Z540.3 Accredited

Product Guide

Benchtop Calibrating Machine




Morehouse Instrument Company, Inc.
1742 Sixth Ave., York, PA 17403-2675 USA



P: (717) 843-0081
F: (717) 846-4193



info@mhforce.com
www.mhforce.com

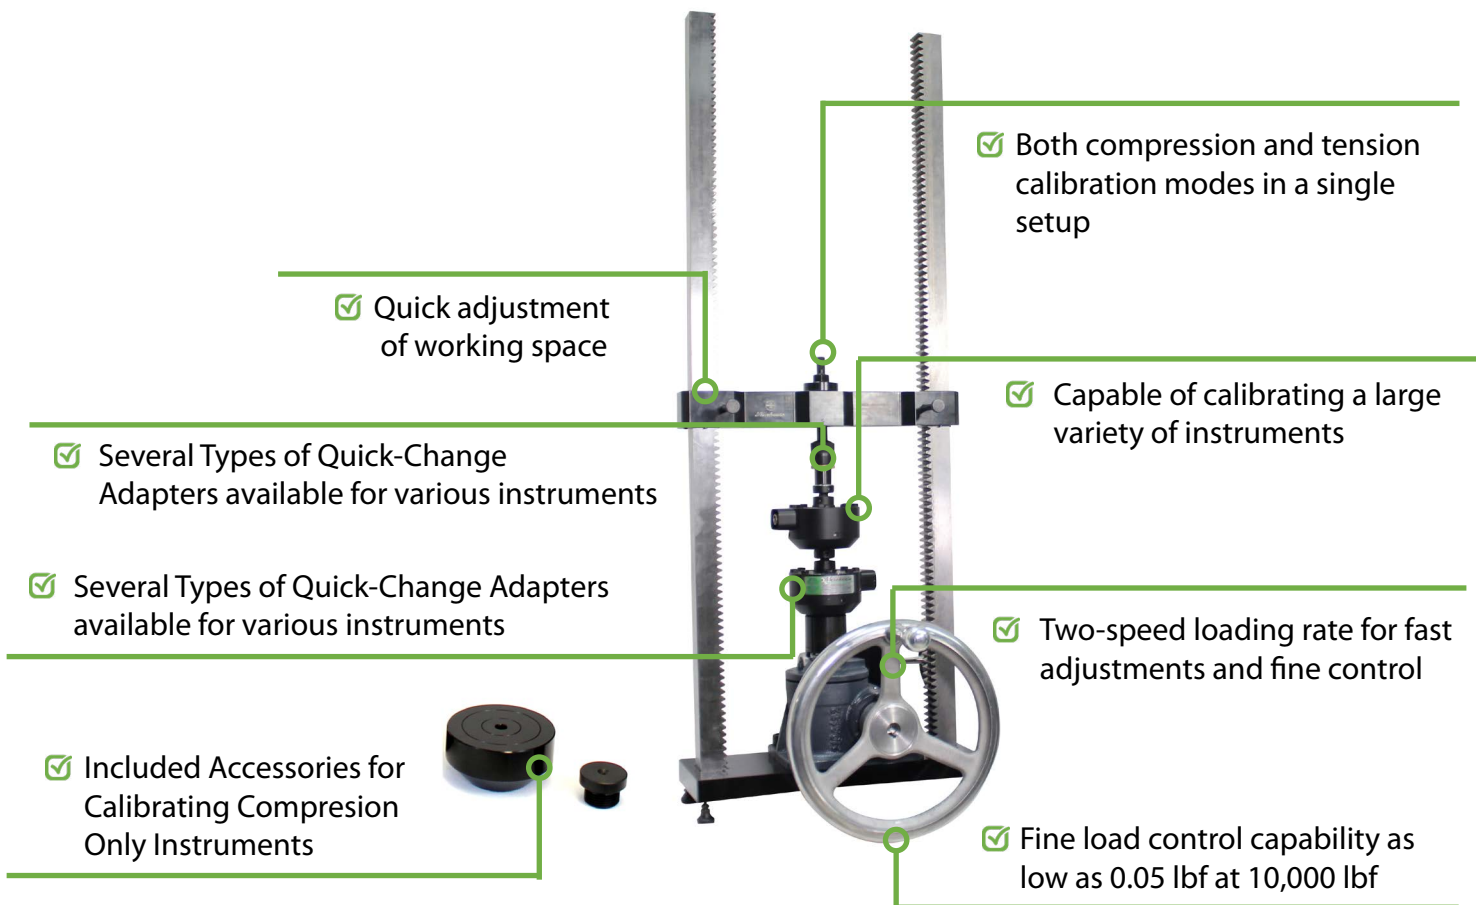

Standard Features

- » Benchtop Calibrating Machine, Model BCM-10MD-1 weighs less than 150 lbs, with a footprint of 17.4 x 16.1 inches
- » Capable of calibrating a variety of equipment such as: load cells, crane scales, dynamometers, tension links, ring force gauges, hand-held digital force gauges, etc.¹
- » Included bearing block and ball seat for calibrating compression only load cells
- » Two-speed mechanical jack with minimal maintenance required, and capable of coarse and fine adjustments controlling force at very fine level depending on the reference standard (control load to as low as ± 0.05 lbf with a 10,000 lbf reference standard)
- » Included swiveling coupling nut for easy and fast setup, compatible with Morehouse Quick-Change Tension adapters at different sizes for calibrating various instruments
- » Morehouse Shear Web Load Cells available as reference standard from 200 lbf to 10000 lbf
- » Robust design, easy operation, and smooth force control even at maximum capacity

¹ Special adapters might be required to calibrate certain instruments in the Benchtop Calibrating Machine.

Technical Specifications

Benchtop Calibrating Machine; 10,000 lbf	
Calibration Capabilities	
Loading Capacity	10,000 lbf
Quick Adjustment Increments	0.393 in.
Maximum Stroke	2.5 in.
Weight with reference standard	150 lbs
Mounting Thread in Standard Reference	0.625"-18, UNF-2B
Standard Handwheel Diameter	10 in.
Dimensions	
Overall Dimensions w/o Handwheel (WxDxL)	17.4 x 16.1 x 47.2 in.
UUT Working Area (WxL)	12 x 20.75 in.
Calibration Capabilities	
Reference Standards Available	200 to 10,000 lbf
Control Resolution ¹	±0.001 % of Ref Standard Capacity
Loading Mode	Compression and Tension
Loading Direction	Ascending and Descending

¹ Example: If the calibrating machine is equipped with a 10,000 lbf Morehouse Ultra-Precision standard reference load cell with 4.0 mV/V rated output, the control capability of the machine would be ±0.05 lbf or ± 0.00004 mV/V.